

Directive 2014/68/EU

Adopted by WGP : 08/01/2016


Adopted by CLAP : 08/01/2016

Directive References: Article 1 § 2 (a)

Subject: Exclusion – Pipeline pressure reduction

Question: Where does the exclusion under Article 1, paragraph 2 (a) end when a pipeline crosses the perimeter of an industrial installation?

Answer: The exclusion of Article 1 paragraph 2 (a) ends at the outlet isolation device of the annexed equipment contained in stations supplying the fluid to the industrial installation.

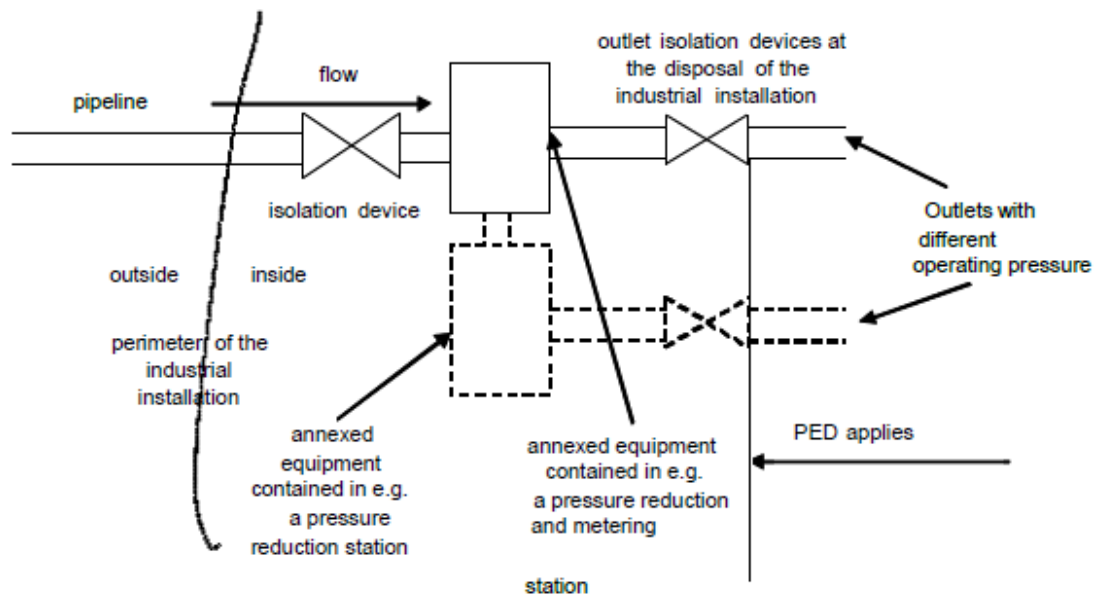

See also Guideline A-28 (CLAP X032) and Guideline A-17 (CLAP X023).

Note: The installation beyond the outlet isolation devices detailed in the above diagram, is covered by the PED; this includes any pressure equipment, any piping between individual operating units or plants, or storage facilities.