

Directive 97/23/EC

Keywords :

Pipeline

Piping

Directive references:

Article 1 §31 - 97/23 EC


Adopted by WPG: 07/03/2013

Adopted by CLAP: 07/03/2013

Subject: Exclusion – Pipeline pressure reduction

Question: Where does the exclusion under Article 1, paragraph 3.1 end when a pipeline crosses the perimeter of an industrial installation?

Answer: The exclusion of Article 1 paragraph 3.1 ends at the outlet isolation device of the annexed equipment contained in stations supplying the fluid to the industrial installation.

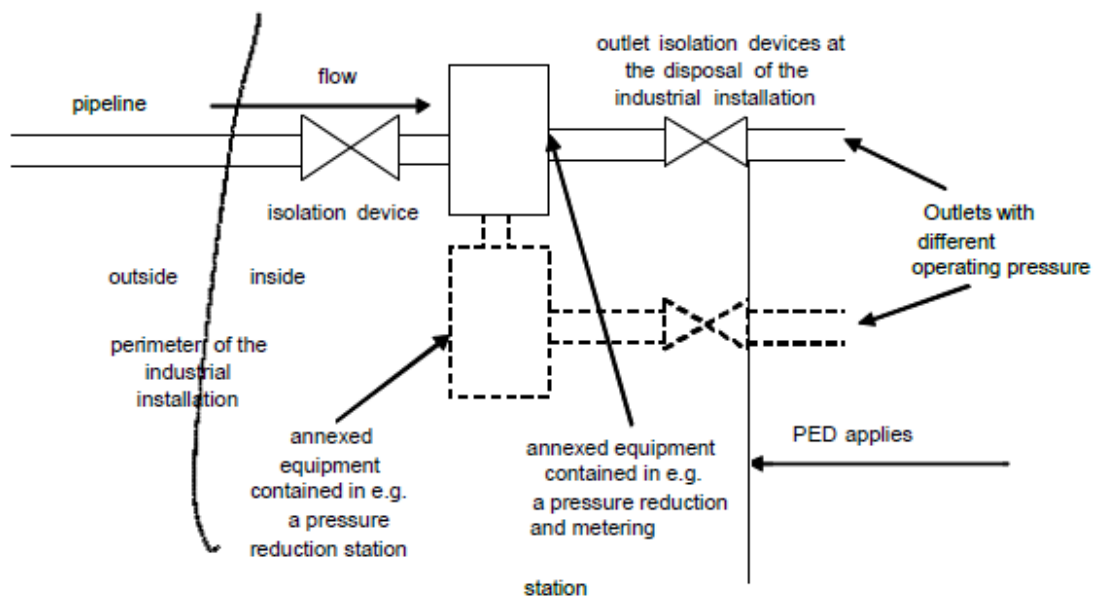

See also Guidelines 1/28 and 1/17.

Note: The installation beyond the outlet isolation devices detailed in the above diagram, is covered by the PED; this includes any pressure equipment, any piping between individual operating units or plants, or storage facilities.

Accepted by WPG on: 2013-01-17 and on 2013-03-07.